ALLURA® SHUTTER





Standard features at a glance

Max height[∆] 14' (4267 mm) Max width[∆] 20' (6096 mm)

Mounting Face-of-wall or between jambs mounting
Curtain Interlocking extruded .05" aluminum slats. Nickel plated, steel screws and

end locks to retain curtain within guides and prevent lateral movement. Plastic roller retainers for curtains over

16' wide

Fenestration/ perforation Open fenestration 1" x 1" uniformly spaced openings, full curtain, 24%

open area;

Perforation full curtain, 22% open area;

Partial fenestration 1" \times 1" uniformly

spaced openings; Partial perforation

Finishes Silver powder coat to mimic look of

clear anodized aluminum; Bronze powder coat to mimic look of bronze anodized aluminum, White or Almond

powder coat

Bottom Bar Aluminum compact bottom bar with

vinyl bulb seal powder coated to

match curtain

Brackets Steel plates powder coated to match

curtain

Guides Extruded aluminum channels with

continuous wear strips. Powder

coated to match curtain

Hood Aluminum two piece square hood

powder coated to match curtain

Counterbalance Steel barrel housing counterbalance

spring assembly

Operation Manual push up

Locking Slide bolts (interior; coil side); left and

right slides

Warranty Limited 2 year warranty for all parts,

components and PowderGuard®
Premium powder coat finish

Options

- Step angle bottom bar attachment
- Interior crank or electric tube motor with crank for emergency egress manual override
- Slide bolts (exterior; non-coil side) suitable for use with padlocks; left and right slides*
- Cylinder lock*
- PowderGuard® Premium powder coat in approximately 200 colors or custom colors per architect specifications
- * Requires interlock with tube motor operation
- $^{\vartriangle}$ Maximum height and width are independent of each other and may vary based on slat profile, material and gauge.



Perfect for security in high pedestrian traffic areas


Heavily visited areas such as retail stores, pharmacies and hospitals often need the security that the Allura® shutter door offers as well as the flexibility in the aesthetic options to match the surrounding environment.

Allura® Model 653 is a next generation light-duty door solution that is versatile enough for specialty uses and has a space-saving design, making it perfect for installations with limited side room and headroom. Multiple perforation and fenestration options allow for many configurations with the right amount of light and air passage.



Standard slat, PowderGuard® Premium powder coat finish in Bronze


Slat style

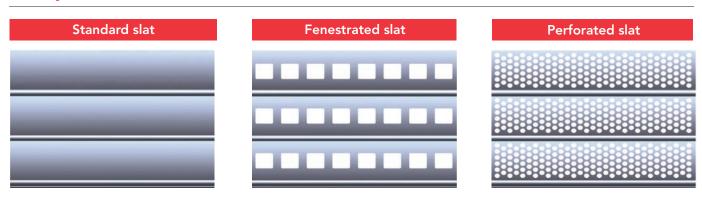

Color options



PowderGuard® Premium powder coat finish options are available in approximately 200 colors and can be custom matched to architect specifications.



Actual colors may vary from brochure due to fluctuations in the printing process. Always request a color sample from your Overhead Door^T Distributor for accurate color matching.



The original, innovative choice for unequalled quality and service.

Overhead Door Corporation pioneered the upward-acting door industry, inventing the first upward-acting door in 1921 and the first electric door operator in 1926. Today, we continue to be the industry leader through the strength of our product innovation, superior craftsmanship and outstanding customer support, underscoring a legacy of quality, expertise and integrity. That's why design and construction professionals specify Overhead Door™ products more often than any other brand. Our family of over 400 Overhead Door™ Distributors across the U.S. and Canada not only share our name and logo, but also our commitment to excellence.







INDUSTRY LEADING **COMMERCIAL & INDUSTRIAL SOLUTIONS**

2501 S. State Hwy. 121 Bus., Suite 200, Lewisville, TX 75067 1-800-929-DOOR • sales@overheaddoor.com overheaddoor.com